



Mini – Flex Connector
 IDC pitch 1,27mm - THT - Plug

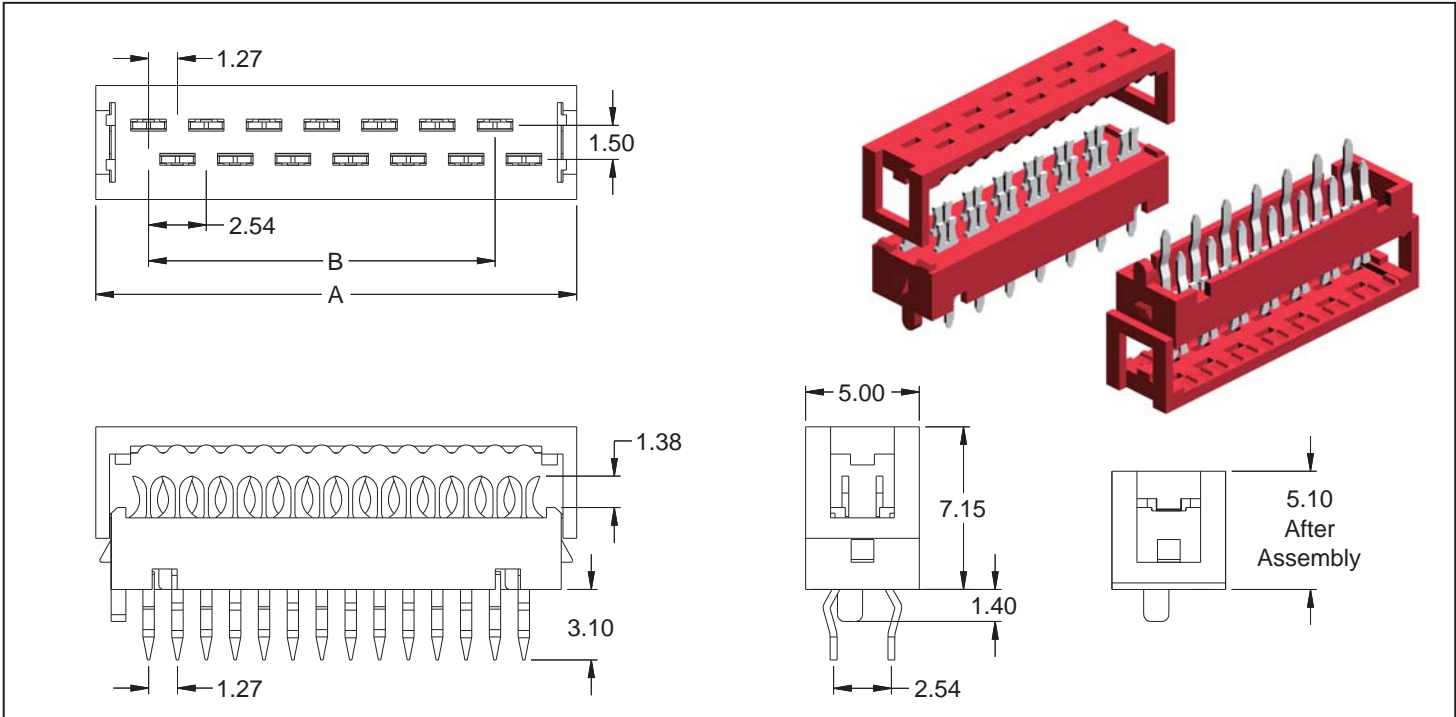

SPECIFICATIONS		RIBBON CABLE RECOMMENDATION	
Current rating	1.5 A	Cable Type	Ribbon UL Style 2651
Voltage rating	230V AC/DC	Spacing	1.27mm
Contact resistance	10 mΩ max.	Wire range	stranded 0.08-0.09mm ² AWG28
Insulator resistance	1000 MΩ min.	Insulation Diameter	solid 0.30 Ø
Withstanding voltage	AC 500 V 1 Minute		0.90mm
Operating temperature	-40°C to +105°C		
Insulator material	Nylon 46 (red) UL 94 V-0		
Contact material	Phosphor Bronze		

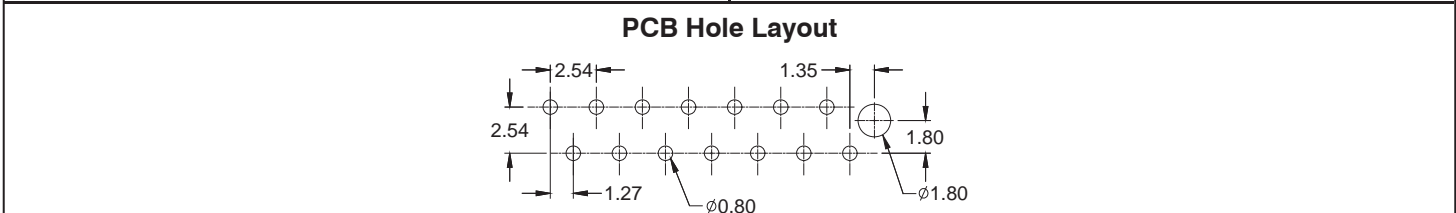

Dimensions (mm)								
Contacts	A	B	Contacts	A	B	Contacts	A	B
004	8.45	3.81	012	18.61	13.97	020	28.77	24.13
006	10.99	6.35	014	21.15	16.51	022	31.31	26.67
008	13.53	8.89	016	23.69	19.05	024	33.85	29.21
010	16.07	11.43	018	26.23	21.59	026	36.39	31.75

How to order

MFP - xxx - DC50 - 99

Nbr of contacts
004; 006; 008; 010 012; 014; 016; 018 020; 022; 024; 026

Plating
99 = Tin others on request