



Mini – Mate Connector
 - THT - straight female Block Shape

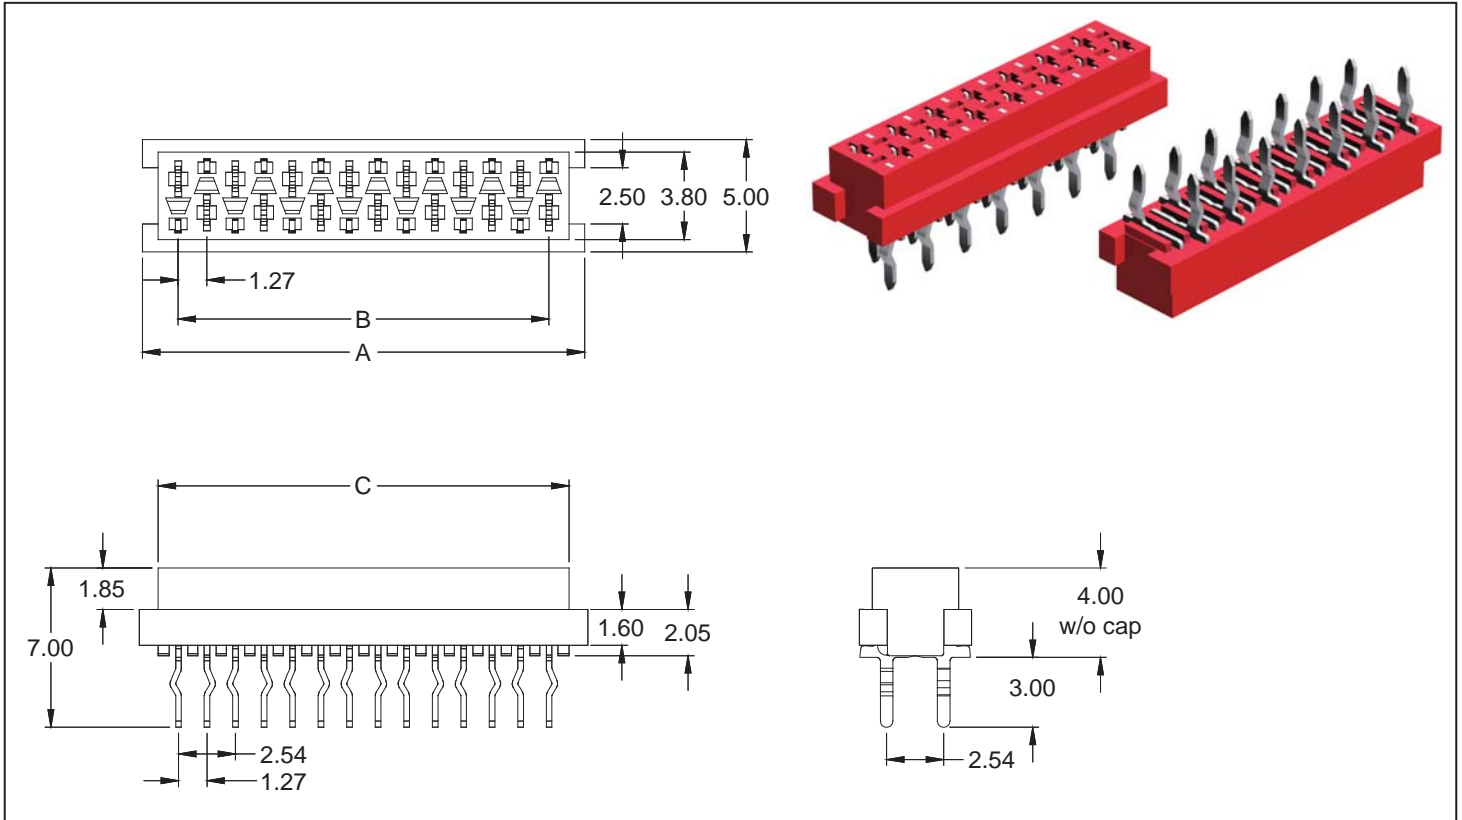

SPECIFICATIONS

Current rating	1.5 A
Voltage rating	230V AC/DC
Contact resistance	10 mΩ max.
Insulator resistance	1000 MΩ min.
Withstanding voltage	AC 500 V 1 Minute
Operating temperature	-40°C to +105°C
Insulator material	Nylon 46 (red) UL 94 V-0
Contact material	Phosphor Bronze

PCB Hole Layout

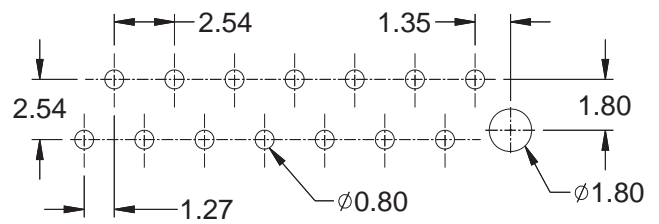

Dimensions (mm)

Contacts	A	B	C	Contacts	A	B	C	Contacts	A	B	C
004	7.00	3.81	5.60	012	17.16	13.97	15.76	020	27.32	24.13	25.92
006	9.54	6.35	8.14	014	19.70	16.51	18.30	022	29.86	26.67	28.46
008	12.08	8.89	10.68	016	22.24	19.05	20.84	024	32.40	29.21	31.00
010	14.62	11.43	13.22	018	24.78	21.59	23.38	026	34.94	31.75	33.54

How to order

MMF - xxx - SB50 - 99

Nbr of contacts

004; 006; 008; 010 012; 014; 016; 018 020; 022; 024; 026
--

Plating

99 = Tin others on request
