



Mini – Mate Connector
 - THT - straight female Latch Shape

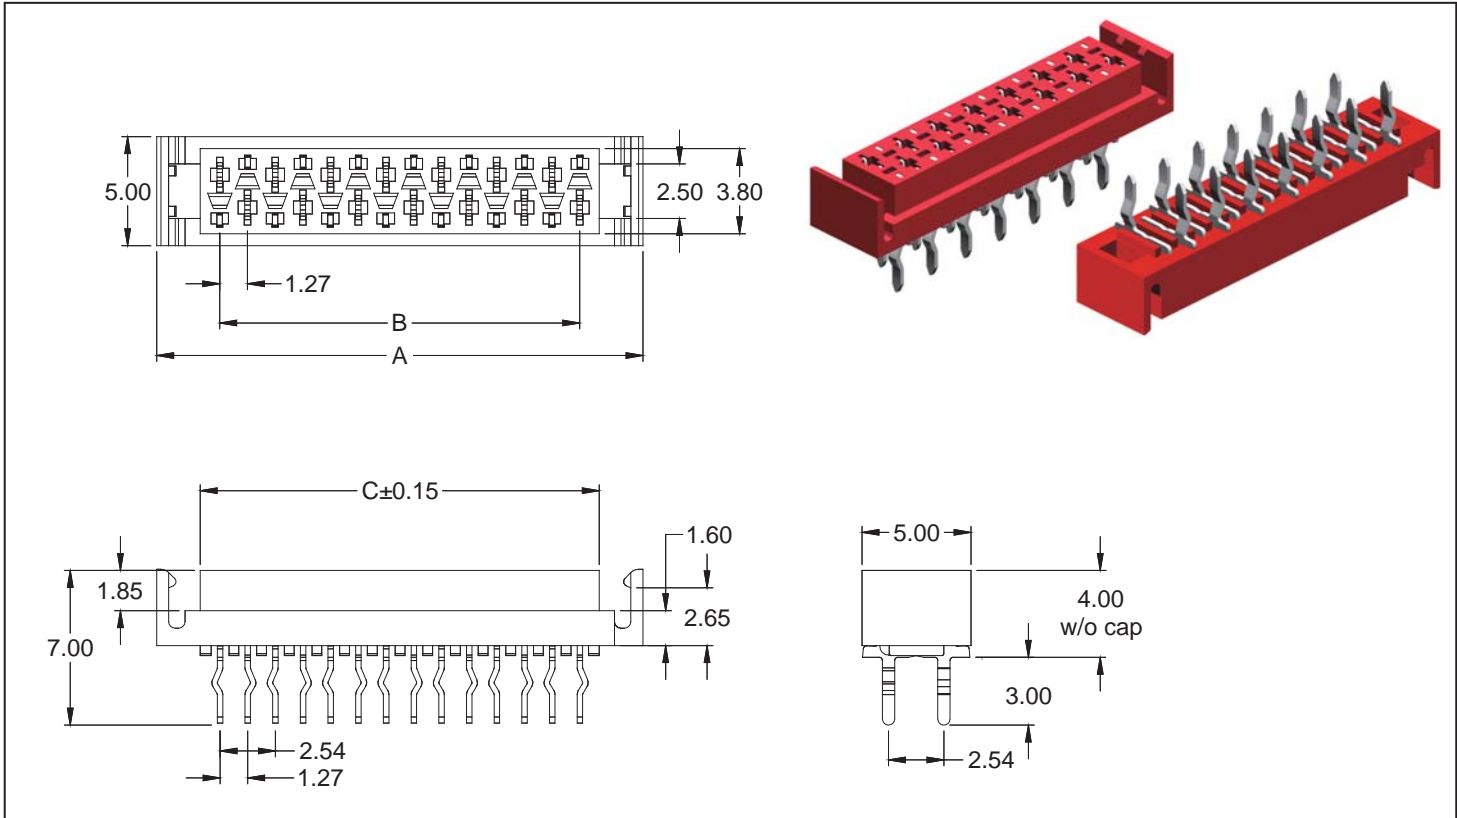

SPECIFICATIONS

Current rating	1.5 A
Voltage rating	230V AC/DC
Contact resistance	10 mΩ max.
Insulator resistance	1000 MΩ min.
Withstanding voltage	AC 500 V 1 Minute
Operating temperature	-40°C to +105°C
Insulator material	Nylon 46 (red) UL 94 V-0
Contact material	Phosphor Bronze

PCB Hole Layout

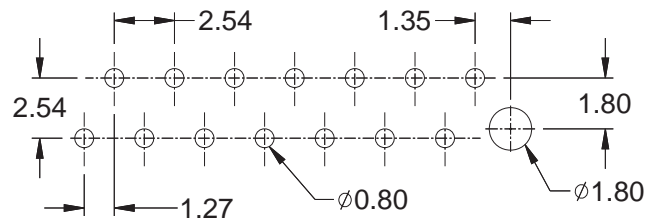

Dimensions (mm)

Contacts	A	B	C	Contacts	A	B	C	Contacts	A	B	C
004	9.70	3.81	5.60	012	19.86	13.97	15.76	020	30.02	24.13	25.92
006	12.24	6.35	8.14	014	22.40	16.51	18.30	022	32.56	26.67	28.46
008	14.78	8.89	10.68	016	24.94	19.05	20.84	024	35.10	29.21	31.00
010	17.32	11.43	13.22	018	27.48	21.59	23.38	026	37.64	31.75	33.54

How to order

MMF - xxx - SL50 - 99

Nbr of contacts
004; 006; 008; 010 012; 014; 016; 018 020; 022; 024; 026

Plating
99 = Tin others on request