
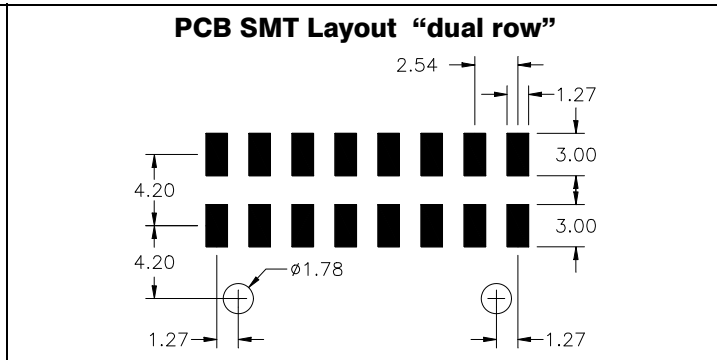
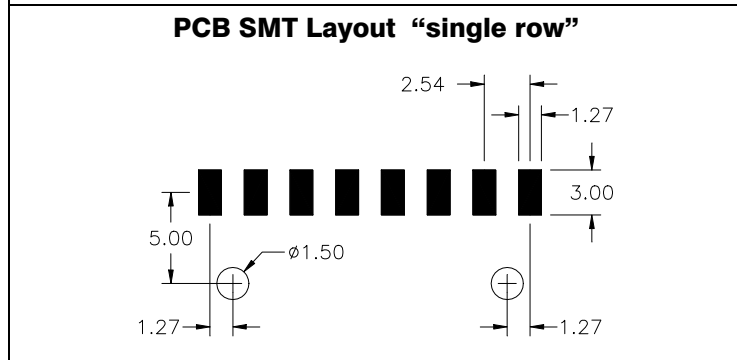


2.54mm pitch Pin Header - slanted -
- SMT - single and dual row

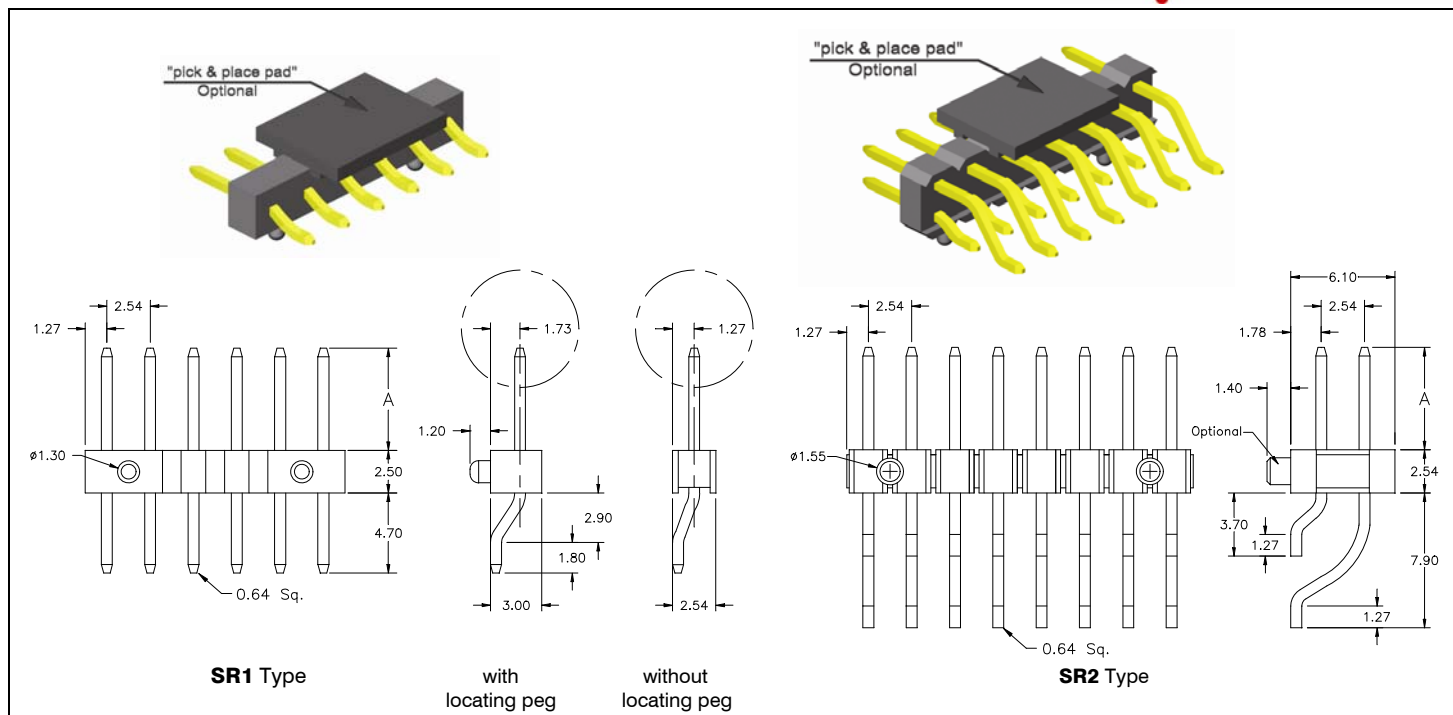

SPECIFICATIONS			
Current rating	3 A	Operating temperature	- 40°C to +105°C
Insulator resistance	1000 MΩ min.	Processing temperature	+250°C +0/-5°C for 10sec.
Contact resistance	20 mΩ max.	Contact material	(RoHS compliant) Copper alloy
Dielectric withstanding	500 V AC	Insulator material	(RoHS compliant) SR1 = Nylon UL 94 V-0 SR2 = LCP UL 94 V-0

How to order

SR x - xxx - H xxx/xx - xx X

Rows	Nbr of contacts	Terminal style	Plating	Packing and "pick & place pad" Option (standard: Tube packing and w/o pick & place pad)
1 single row	without locating pegs 002 to 040	Standard 135/02	Standard: 55 = gold On request: 95 = tin/gold <i>(tin leadfree)</i>	without "locating pegs" A = tube packing and pick & place pad B = reel packing and pick & place pad with "locating pegs" C = tube packing, without pick & palce pad D = tube packing and pick & place pad E = reel packing and pick & place pad
	with locating pegs 003 to 030	others: 135/00 3.00mm 135/01 3.60mm 135/03 6.80mm 135/04 7.20mm 135/05 7.40mm 135/06 10.70mm 135/07 10.40mm		
2 dual row	006 to 080			