



2.54mm - SMT- Female Header  
 - side entry - single & dual row

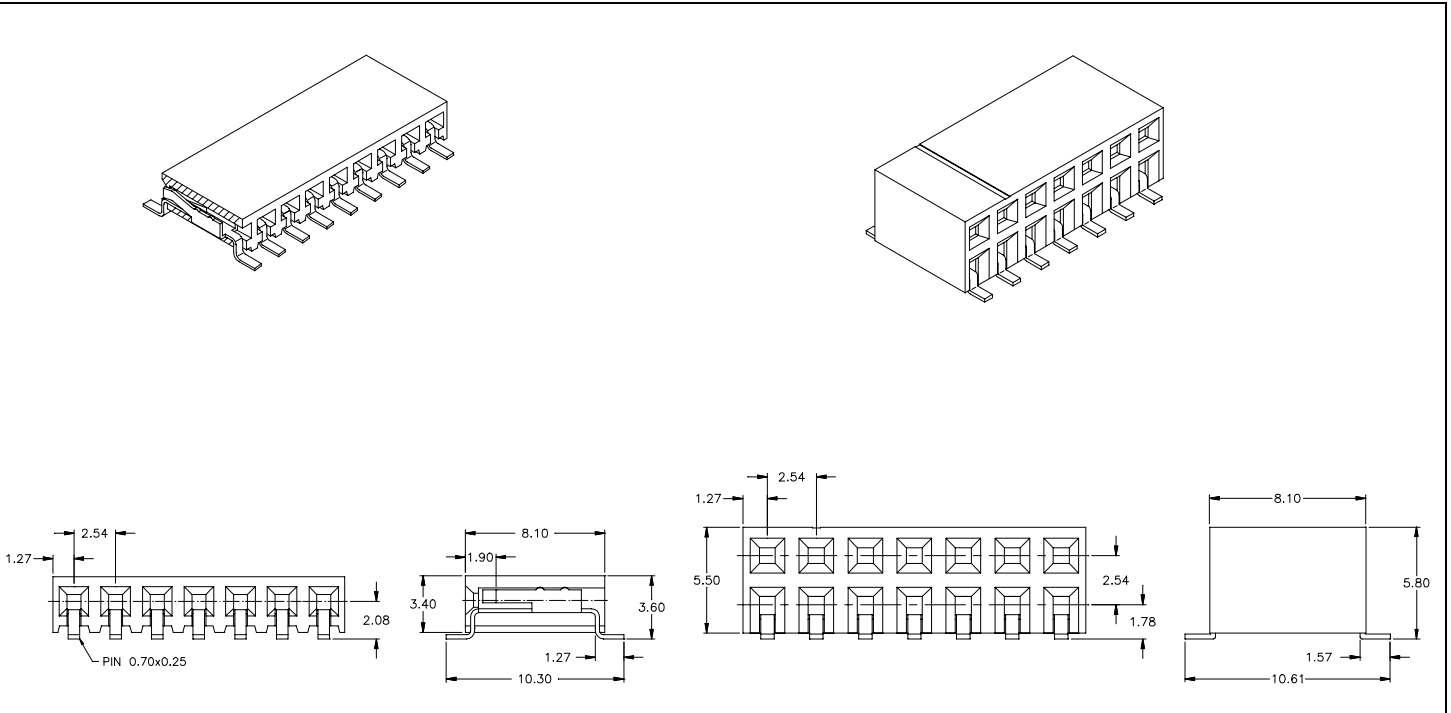

**APPLICATION AND FEATURES**

- **Standard: tube packing**
- Hi-rel dual beam contact assures reliable PC-board connections
- Accepts 0.64mm square pins
- Stand-off's facilitate post solder cleaning
- Lowest possible profile
- Automatic assembly to PCB possible

**PCB SMD Layout**

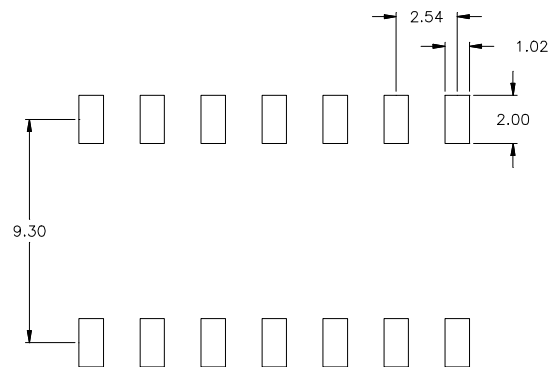

**SPECIFICATIONS**

Current rating	3 A	Operating temperature	- 40°C to +105°C
Insulator resistance	5000 MΩ min.	Processing temperature	+260°C +0/-5°C for 20~40sec.
Contact resistance	20 mΩ max.	Contact material (RoHS compliant)	Phosphor Bronze
Dielectric withstanding	AC 500 V	Insulator material (RoHS compliant)	Nylon UL 94 V-0

How to order

BS x - xxx - R350 - 95

