



2.54mm Female Header Low Profile

- Dual Entry Type -

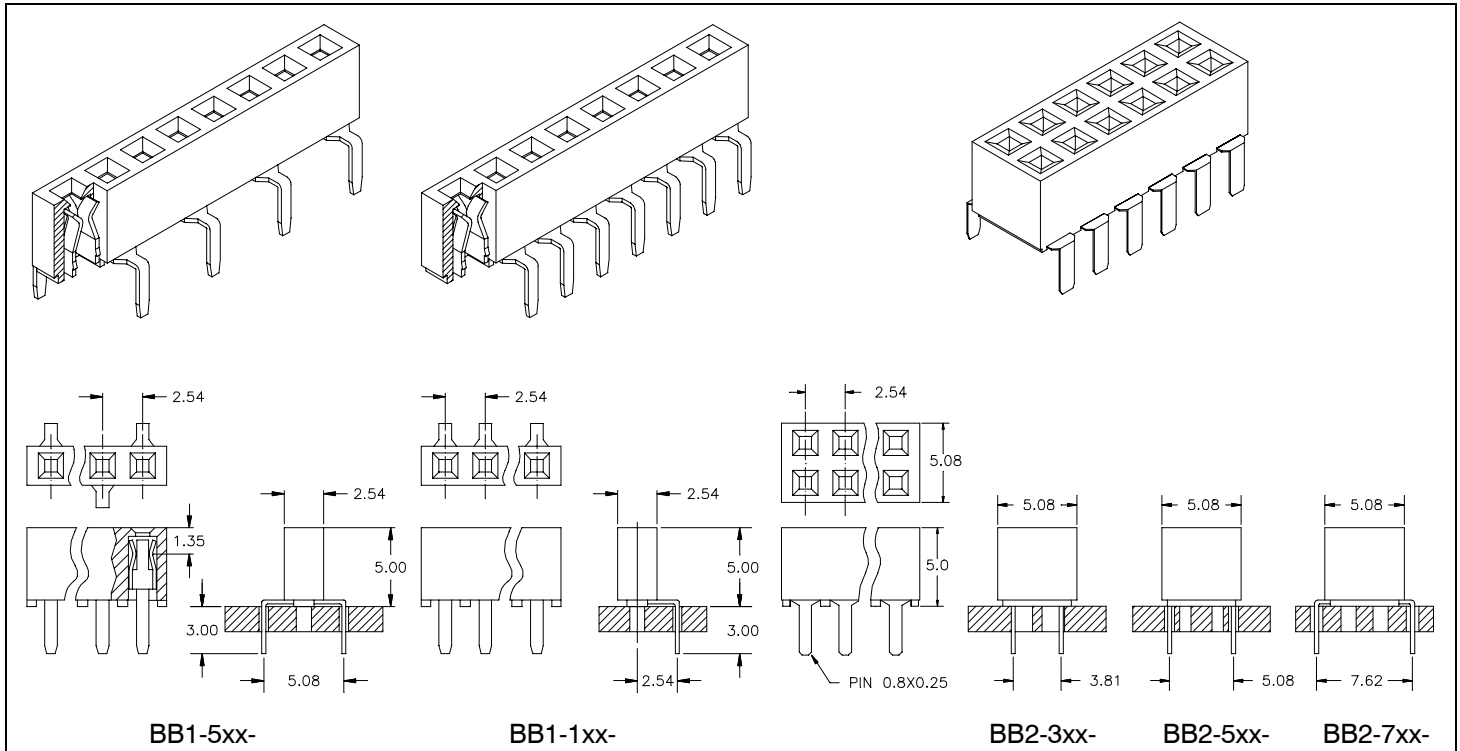

P.C.B. Hole Layout

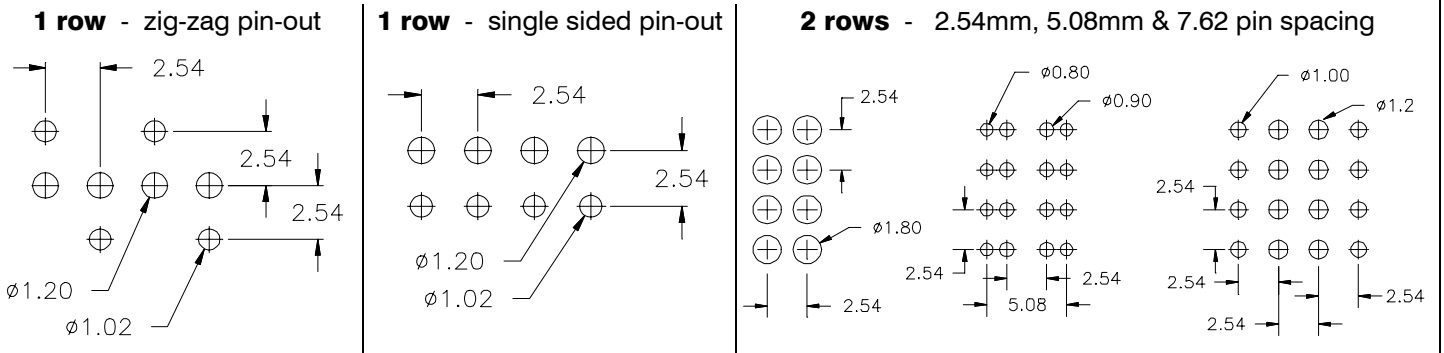

APPLICATION AND FEATURES

- Hi-rel dual beam contact assures reliable PCB connections
- Dual entry design for board stacking
- Accepts 0.64mm square pins
- Stand-off's facilitate post solder cleaning

SPECIFICATIONS

Current rating	3 A
Insulator resistance	5000 MΩ min.
Contact resistance	20 mΩ max.
Dielectric withstanding	AC 500 V
Operating temperature	- 40° to +105°C
Contact material (RoHS compliant)	Phosphor Bronze
Insulator material (RoHS compliant)	P.B.T. UL 94 V-0

How to order

BB x - x xx - S500 - 55

Rows	Pin spacing	Nbr of contacts	Plating
1 = single row	1 = single side only 5 = 5.08mm zig-zag	single row = 03 to 40	55 = gold
2 = dual row	3 = 3.81mm 5 = 5.08mm 7 = 7.62mm	dual row = 06 to 80	