

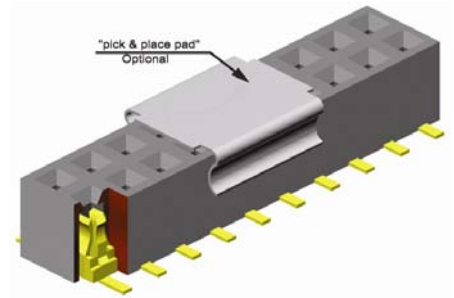



2.54mm pitch Female Header - SMT -
Top & Bottom Entry 3.65mm profile

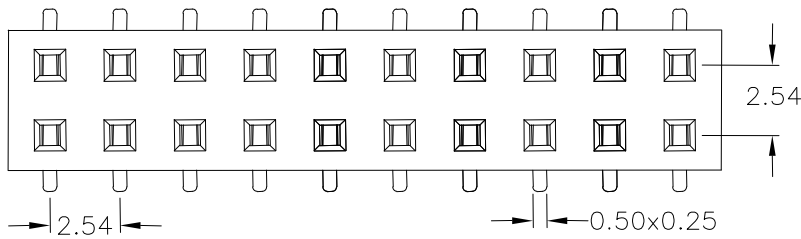

APPLICATION AND FEATURES

- **Standard:**
tube packing and without "pick & place pad"
- 3.65mm height above board.
- Hi-rel dual beam contacts
- Designed for board to board small spacing interconnection
- Mating with 2.54mm pitch, 0.64mm square pin headers

PCB Surface Mount & Hole Layout

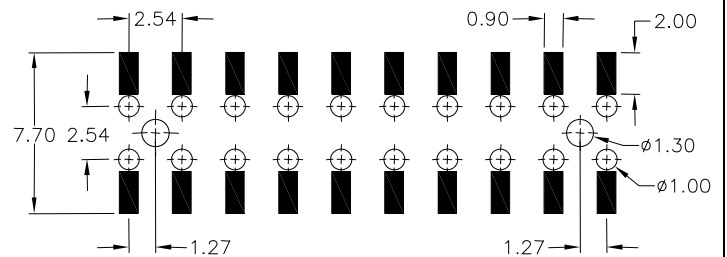

SPECIFICATIONS

Current rating	3 A
Insulator resistance	1000 MΩ min.
Contact resistance	20 mΩ max.
Dielectric withstanding	500 V AC

Operating temperature	- 40° to +105°C
Processing temperature	+250°C +0/-5°C for 10sec.
Contact material	(RoHS compliant) Phosphor Bronze
Insulator material	(RoHS compliant) Nylon UL 94 V-0

How to order

BS2 - xxx - TB 365 - 55 / X

