



1.27mm pitch Female Header
 - THT - dual row straight & right angle

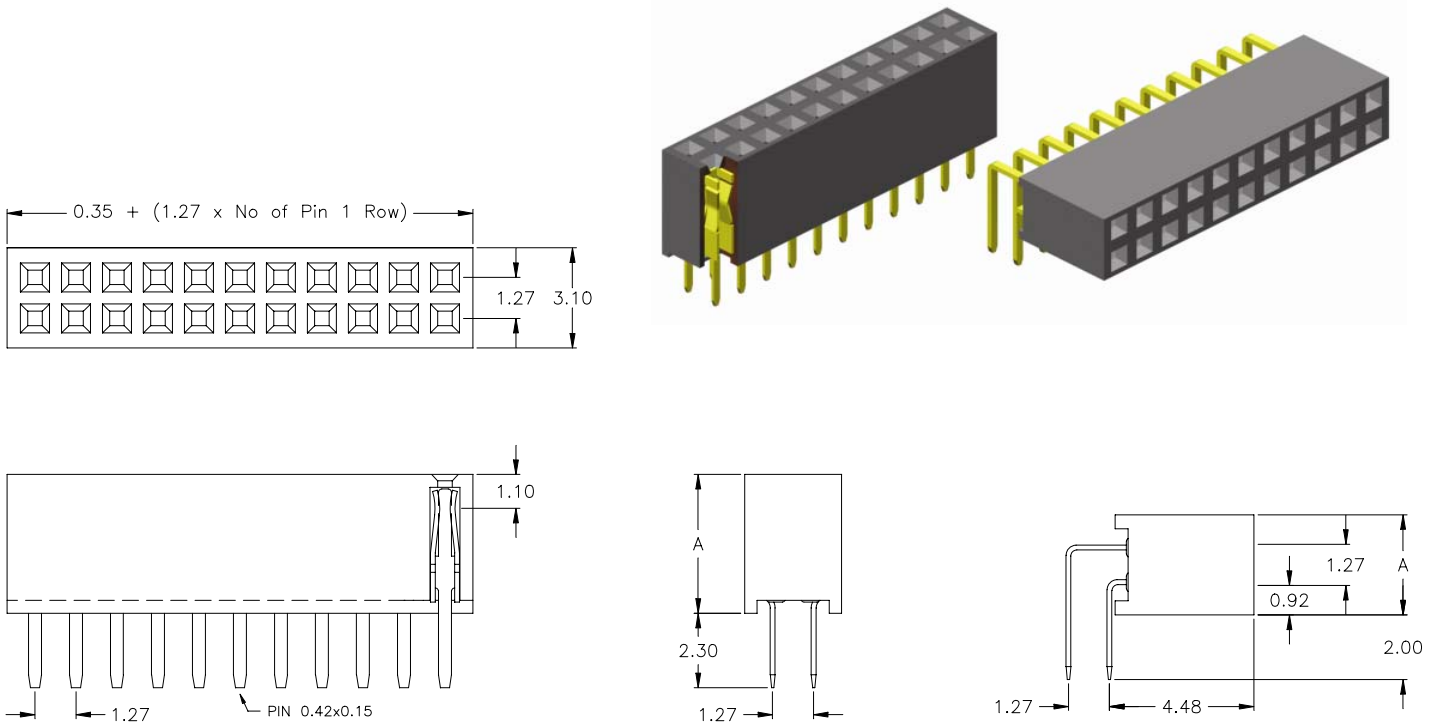

APPLICATION AND FEATURES

- 3.40 or 4.30mm height above board straight type
- Hi-rel dual beam contact assures reliable PC-Board connections
- Accepts 0.40mm square pins
- Stand-off's facilitate post solder cleaning
- Side stackable

PCB Hole Layout

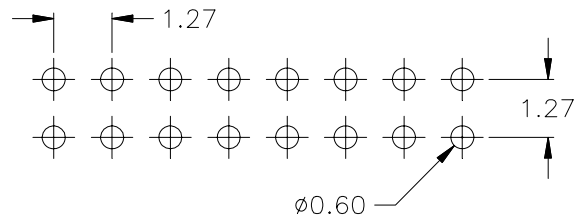

SPECIFICATIONS

| | | | |
|-------------------------|--------------|-----------------------|----------------------------------|
| Current rating | 1 A | Operating temperature | - 40° to +105°C |
| Insulator resistance | 1000 MΩ min. | Contact material | (RoHS compliant) Phosphor Bronze |
| Contact resistance | 20 mΩ max. | Insulator material | (RoHS compliant) Nylon UL 94 V-0 |
| Dielectric withstanding | 500 V AC | | |

How to order

BL 2 - xxx - X xxx - 55 / 11

| Nbr of contacts | Version | DIM "A" | Plating |
|-----------------|------------------|---------|--------------------------------|
| 006 to 100 | S340 straight | 3.40 mm | 55 = gold others on request |
| 004 to 100 | S430 straight | 4.30 mm | |
| 004 to 100 | R430 right angle | 3.10 mm | |